

ROBBINS® Momenti Dolci™ Porcelain Stone®



ROBBINS® Momenti Dolci™ Porcelain Stone®

Nature – and humanity’s affinity for it – influences design in every space.

From color to texture, natural finishes and those inspired by the outdoors bring both solace and sophistication to our interiors. Momenti Dolci by Robbins takes its cues from the elegance of Italian Pietra di Cardosa and the United State’s Vermont Slate and merges those qualities with technical advancements to create a porcelain tile unlike any before. You will notice the difference in Momenti Dolci when you first touch it. The Leathered finish offers a buttery, cashmere-like feel unique to Robbins – a first for porcelain tile. Smooth, silky, and soft to the touch, this finish is perfect for bare-feet floors and luxurious wall finishes, yet features a DCOF suitable for commercial applications. Our Leathered finish creates a subtle, glowing sheen with a distinct, satiny visual depth. Subtle, minimalist veining resists high traffic and the elements indoors and out, thanks to an additional textured exterior finish offered in the line. As big as the great outdoors, our soft-to-the-touch, slate-inspired porcelain tile features domestically manufactured, impressive 24”x48” tiles, as well as traditional 12”x24” and 24”x24” offerings. All are rectified for high-end installations indoors and out. For demanding exterior applications, our textured (EXT) finish tiles have an average minimum 0.60 DCOF and come in 12”x24” and 24”x24”. Rounding out the offering are 2 mosaics, bullnose, and covebase. This impressive trim package provides a large range of application feasibility – from durable commercial installations to gorgeous residential interiors. Feel the difference of Momenti Dolci by asking for a sample today or ordering online at Robbins.com



Floor: OS22438 ▶ Raven Wing





Floor: OS24428 ▶ Snow Fall 24 x 24 LTR and 2 x 2 Mosaic Border
Wall: OS24428 ▶ Snow Fall 24 x 48 LTR

Color Palette


Available Colors



OS24428 ▶ Snow Fall




OS24433 ▶ Silver Lining

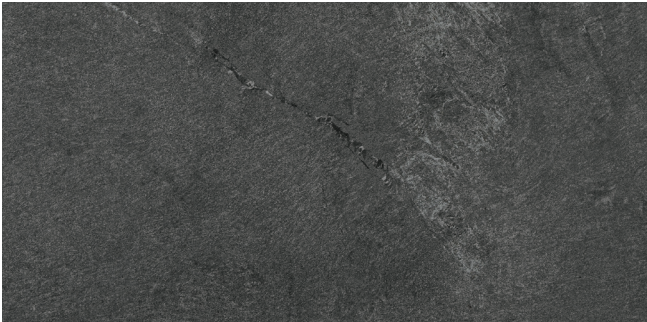


OS22438 ▶ Raven Wing

Available Finishes

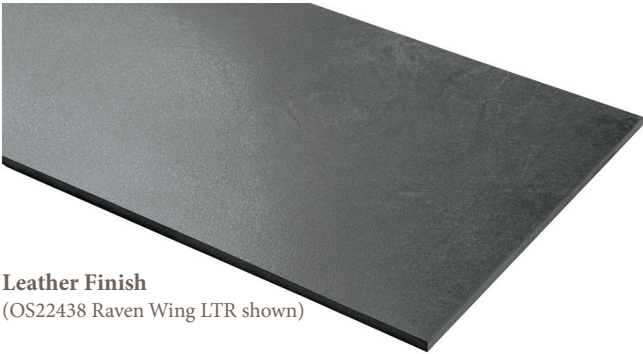

Leather Finish
(OS22438 Raven Wing LTR shown)

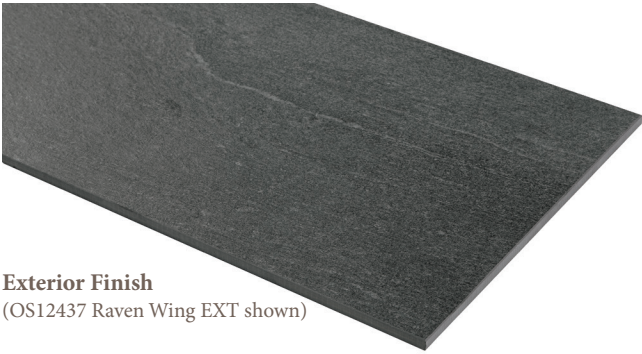

Exterior Finish
(OS12437 Raven Wing EXT shown)



OS24433 ▶ Silver Lining




Floor: OS24433 ▶ Silver Lining 24 x 24 LTR



Floor: OS22438 ▶ Raven Wing 24 x 48 LTR

Specifications


Sizes (Shown in OS22438 Raven Wing)

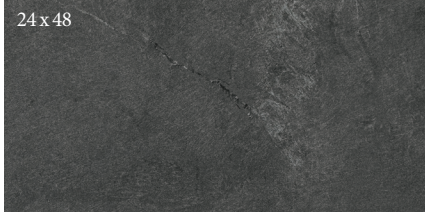

24 x 48



24 x 24




12 x 24



Geometric Mosaic[†]

(Mounted on a 217 x 372 mm sheet)



2 x 2 Mosaic

(Mounted on a 298 x 298 mm sheet)

† Due to this mosaic's design, caution should be used when installing on surfaces that might contact bare skin or other delicate materials. To prevent possible injury or damage from sharp corners that might be exposed above the grout line, install per ANSI 108 guidelines in order to minimize or prevent lippage.

Sizes & Finishes

Field Tile - Rectified

Available in all colors

Nominal (in)	Actual (mm)	Thickness (mm)	Grout Joint (mm)	Finish
12 x 24	297 x 597	9.5	3	LTR/EXT*
24 x 24	597 x 597	9.5	3	LTR/EXT
24 x 48	597 x 1197	10.5	3	LTR

Note: Field tile is rectified with a minimum 3mm grout joint

* Extended lead time on 12 x 24 EXT finish.

Mosaics

Available in all colors

Nominal (in)	Actual Size (mm)	Thickness (mm)	Grout Joint (mm)	Finish
2 x 2 Mosaic**	298 x 298	9.5	3	LTR
Geometric Mosaic [†]	217 x 372	9.5	2	LTR

** Mounted on 12 x 12 sheet with 3mm grout joints

† Due to this mosaic's design, caution should be used when installing on surfaces that might contact bare skin or other delicate materials. To prevent possible injury or damage from sharp corners that might be exposed above the grout line, install per ANSI 108 guidelines in order to minimize or prevent lippage.

Coordinating Trim

Available in all colors

Nominal (in)	Actual (mm)	Thickness (mm)	Grout Joint (mm)	Finish
6 x 12 Cove Base	150 x 297	9.5	3	UPS
4 x 24 Single Bullnose	96 x 597	9.5	3	LTR



6 x 12 Cove Base



4 x 24 Bullnose

Product Performance

Breaking Strength	>450 lbf	ASTM C648
Bond Strength	>200 psi	ASTM C482
Chemical Resistance	Unaffected	ASTM C650
Frost Resistance	Resistant	ASTM C1026
Water Absorption	<0.50%	ASTM C373
Scratch Hardness	7	Mohs Scale

Wet Dynamic Coefficient of Friction Range

LTR (Leather)	0.42 - 0.52	ANSI A326.3
EXT (Textured)	0.60 - 0.70	ANSI A326.3

Get Planked!

Our Porcelain Stone[®] products are available in popular plank shapes with no minimum order and quick fulfillment.

See website for more details and sizes.



Shade & Texture Index

Momenti Dolci has a shade variation of V3.

V1	V2	V3	V4	V1 Uniform appearance
				V2 Slight Variation
				V3 Moderate Variation
				V4 Substantial Variation

This porcelain tile product is produced with a V3 variation. While the colors and/or textures present on a single piece of tile will be indicative of the colors and/or textures to be expected on the other tiles, the amount of colors and/or texture on each piece may vary significantly. It is recommended that the range be viewed before selection.

Recommended Use

Momenti Dolci LTR is recommended for interior floors, interior walls, countertops, exterior walls, pool waterlines and full linings[†] in both residential and commercial applications. Momenti Dolci LTR is not recommended for exterior horizontal surfaces or exterior paving. Momenti Dolci EXT is recommended for exterior floors and walls in both residential and commercial applications. See Robbins.com for detailed installation instructions.

[†]Excludes mesh mounted mosaics.

Leather Finish (LTR)

Leathered finish creates a subtle glow, visual depth, and a smooth feel. The finish is achieved by running diamond-tipped brushes over the surface of fired porcelain tile, resulting in an incredibly soft feel and tremendous visual richness. While our Leathered finish may be soft to the touch, the DCOF remains high, making it suitable for residential and commercial interior floor and wall applications and exterior vertical surfaces.

Wet area use for Momenti Dolci Mosaics

Robbins[®] produces the Momenti Dolci 2 x 2 and Robbins mosaics with the Leather (LTR) finish. The ANSI A326.3 wet Dynamic COF of Momenti Dolci is ≥ 0.42 . Their small sizes ensure frequent grout joints which provides traction and drainage. Robbins cannot control situations involving incorrect installation, improper slope to the drain for elimination of standing water and poor surface cleaning.

This information is provided so that customers may make a realistic and informed decision when comparing Momenti Dolci to other tile products in wet area environments, such as residential/commercial bathrooms, showers, and interior pool decks.

Care and Maintenance

Regular cleaning is the best way to keep Momenti Dolci tile looking good for years to come. Use clean, hot water (combined with a household cleaner for more aggressive cleaning). Rinse thoroughly and dry with a soft cloth to prevent water spots. No waxes or sealers are needed. More information regarding the care and maintenance of Robbins products is available at Robbins.com.

Our Warranty

Robbins guarantees that its products will meet or exceed the performance specifications outlined in ANSI A137.1-2012 and in the performance data section of the Robbins general product catalog. For complete details check our website at Robbins.com.

Information listed here is subject to change. Please refer to Robbins.com for the latest, most accurate information.

Crossville[®] Sample Express

Visit the website to learn more:

Robbins.com

Loose Samples for
Architects & Designers

Loose Tile Samples

Sizes may vary depending on
product series
Max. of 4 large field tile per order

Replacement Chips for PSS Rack

Max. of 5, 2 x 2 chips per color

Standard Shipping

FedEX Ground

Trade Organizations



Environmentally Aware



Momenti Dolci™

AHF Products

3840 Hempland Rd.
Mountville, PA
17554

Phone 866 243-2726
Web Robbins.com



Above:
Floor: OS24428 ▶ Snow Fall
On the cover:
Floor : OS22438 ▶ Raven Wing

ROBBINS®